

Switch Always On AC

Unprecedented Remote Power Control
for Diverse Applications.



The Switch Always On AC is a next-gen remote power control & management solution built to provide unbeatable power control and dependability across a range of industries. From digital signage to unattended kiosks and vending machines, this dynamic device offers integrated features and a robust design, making it a must-have for businesses looking to boost their operational efficiency and maximize uptime.



Programmable AC Outlets

Featuring 2 or 4 ports capable of power delivery and remote reboots, each outlet can be independently managed for auto or remote rebooting, optimizing energy usage.



Robust Connectivity Options

Dual Ethernet 10/100 Mbps, Wi-Fi IEEE 802.11 b/g/n, LTE Cat 1 for reliable and constant connectivity.



Internal Battery Backup

Keeps devices running with up to 7 days of heartbeat alerts during AC mains loss.




Cloud Management

3-year cloud access for alerts, remote management, and diagnostics.

Complete Your Setup with Switch Always On App

Your gateway to advanced cloud management capabilities! With this powerful application, you can take control of your systems like never before. Enjoy round-the-clock monitoring, real-time alerts, and optimization tools to ensure your systems perform at their best.

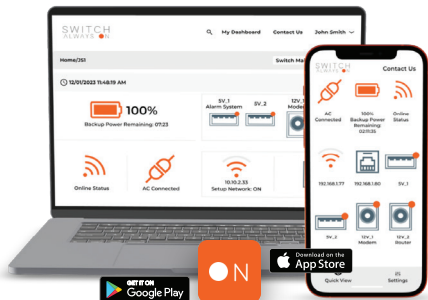

Reliable power management is crucial for consistent operation in business. The Switch Always On AC reduces downtime and maintenance costs with remote system management and reboots, saving time and cutting operational costs.

Benefits

-  Reliable Operations & Remote Efficiency
-  Advanced Connectivity & Safety
-  Compact & Versatile

Ideal For

-  Digital Signage
-  Unattended Self-Service Kiosks
-  Vending Machines

Technical Specifications

Input AC Ratings:

AC Input:

110VAC-240VAC, 50/60Hz, 15A

Output AC Ratings:

of AC Outlets:

2 Individually Controlled AC Outlets

AC Outlet 1 & 2 Ratings:

110VAC – 240VAC, 15A

Internal Backup Battery:

Battery Chemistry: ETL/cETL:

Li-Polymer Battery UL1642, IEC62133(CB)

Optional Accessories:

of Dry Contacts:

2 Dry Contacts

Nominal Battery Voltage:

~3.7V / 3200mAh (UL)

of Temperature/Humidity Sensor Ports:

1 Port

Connectivity/Cloud:

Wired:

Dual Ethernet
10/100 Mbps

Wireless:

Wi-Fi IEEE 802.11 b/g/n
2.4GHz

Safety Compliance:

CE:

DTM CE

ROHS:

Compliant

Backup Cell:

LTE Cat 1
(PRO version)

Cloud Connectivity:

3 Year Cloud Access
& Alerts

ETL/cETL:

DTM UL 60950-1
Information
Technology
Equipment Safety

FCC:

DTM FCC Title 47
CFR 15 Subpart B
Emissions Class A

Mechanical:

Form Factor:

Ultra Compact

W x D x H:

4.9" x 5.75" x 1.75"

Weight:

~1lb